CONNECTOR
HOUSING: KYOCERA ELCO CORP. 61-8005-002-000-0002 OR EQUIVALENT
CONTACT: KYOCERA ELCO CORP. 71-8005-999-000-867 OR EQUIVALENT

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
–	RELEASED FROM ENGINEERING	10/28/02	

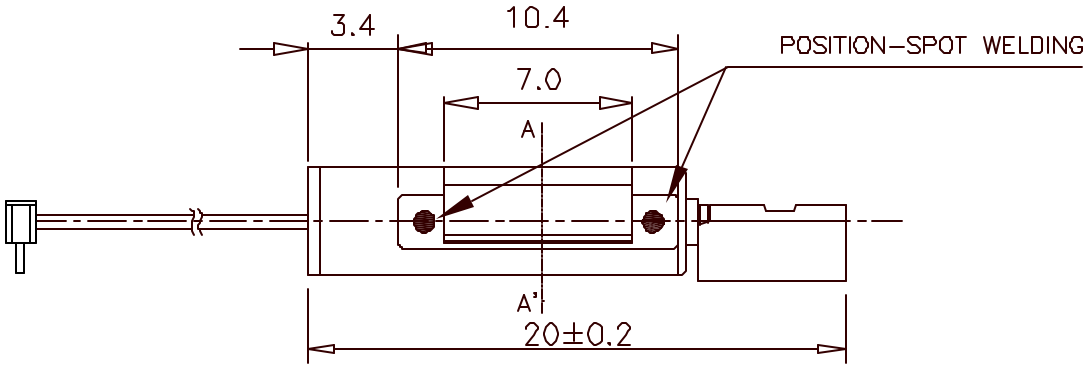

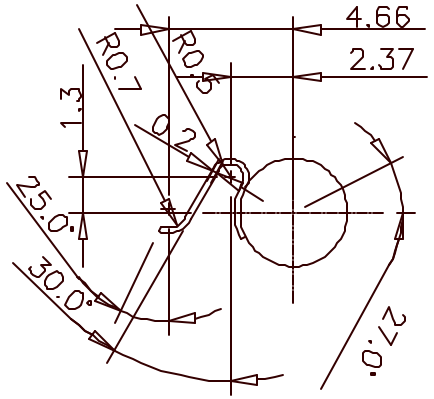

CUT A–A'

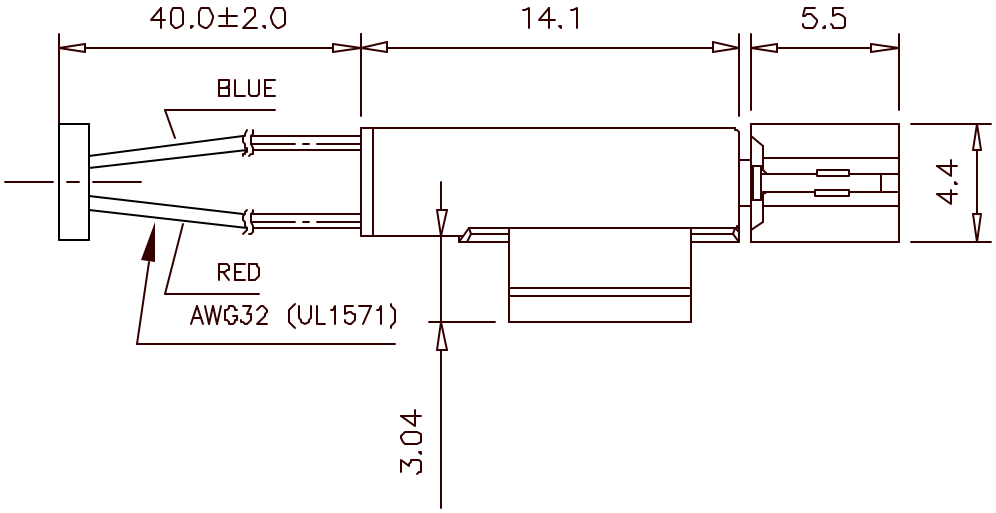

RATED VOLTAGE : DC1.3V
MIN. STARTING VOLTAGE : 0.9V MAX.
LOAD CURRENT: 90mA MAX.
LOAD SPEED : 11,000±2000RPM MAX.
ARMATURE RESISTANCE : 13.5±20%

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

DRAWING NAME
MV4020–13CNU.DWG

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:
FRACTIONS ± —— DECIMALS .XX ± X.X .XXX ± —— ANGLES ± ——

APPROVALS	DATE
DRAWN B. W.	10/02
CHECKED	
APPROVED S. J.	10/28/02

projects unlimited Dayton , Ohio

MOTOR VIBRATOR
MV4020–13CNU

SIZE	MATERIAL	DRAWING NO.
A		MV4020–13CNU

SCALE N/A | MAX. WT. | SHEET 1 OF 1